



C.F.R. s.r.l.
MODENA - Italy

TECHNICAL DATASHEET
3 PHASE INDUCTION MOTOR


Stator Diameter	243
Stator Length	210
Rev.	01
Date	16-Jun-2022
Page	1

Curve Code

A00550-24315521008004TS0B-C_650Arms

	DESCRIPTION	SYMBOL	VALUE	UNIT
NOMINAL	Rated Power	P_n	24100	[W]
	Rated Speed	n_n	3400	[RPM]
	Rated Torque	T_n	67,7	[Nm]
	Rated Current	I_n	359	[Arms]
	Rated Duty	S2	60	[min]
	Battery Voltage	V_{DC}	80	[V]
	Rated Frequency	f_n	113	[Hz]
PEAK	Peak Torque	T_p	290	[Nm]
	Peak Current	I_p	1116	[Arms]
	Peak Duty	S2	1	[min]
FEATURES	Ambient Temperature	ϑ_a	from -20° to +40° C *	[°C]
	Number of poles		4	
	Insulation Class		F	
	Thermal Protection		STS1	
	Cooling System		Not Ventilated	

* The minimum temperature -20°C is only for degree of protection IP65 or higher.

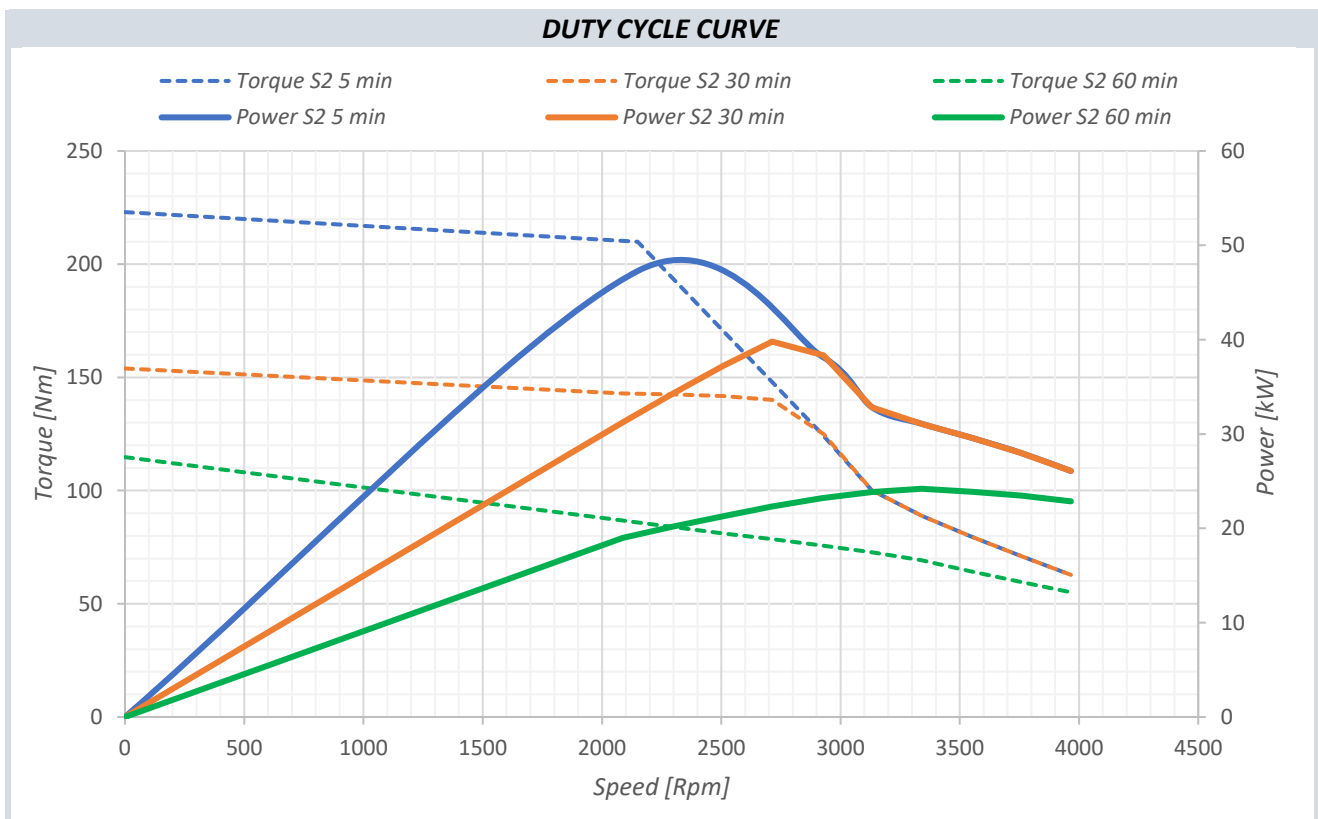



C.F.R. s.r.l.
MODENA - Italy


TECHNICAL DATASHEET
3 PHASE INDUCTION MOTOR

Stator Diameter	243
Stator Length	210
Rev.	01
Date	16-Jun-2022
Page	2

Curve Code


A00550-24315521008004TS0B-C_650Arms

CURRENT MAP

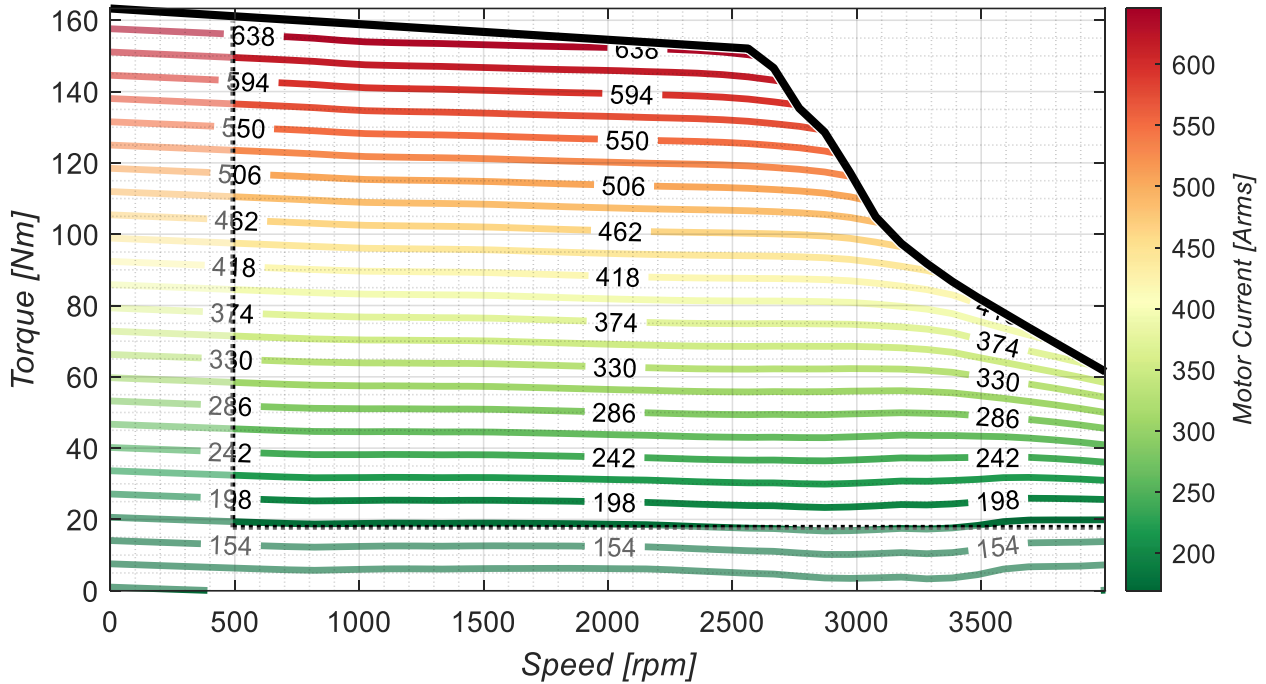

The data behind the dashed line are extrapolated with lower accuracy

EFFICIENCY MAP

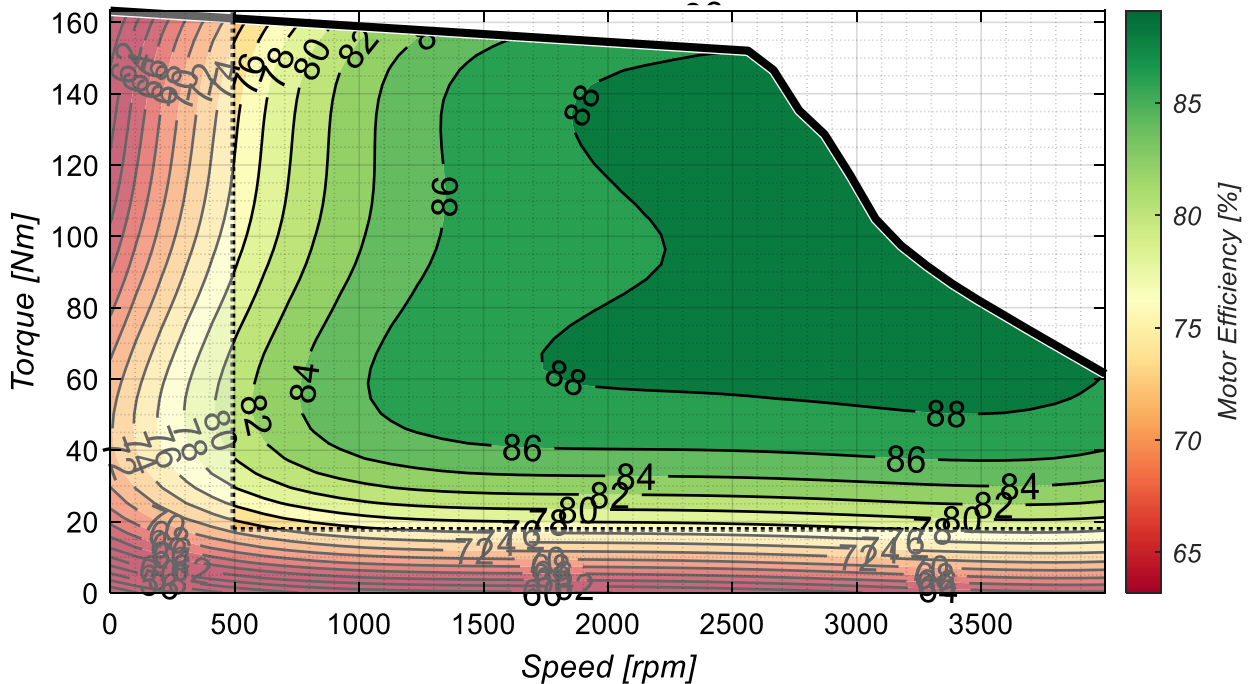

The data behind the dashed line are extrapolated with lower accuracy